


Super Antenna MP1 Frequency Adjustment Guide



SuperSlider™

Use of FG1 Frequency Guide SWR Ruler is recommended for adjustment of all MP1 and DP series Super Antennas

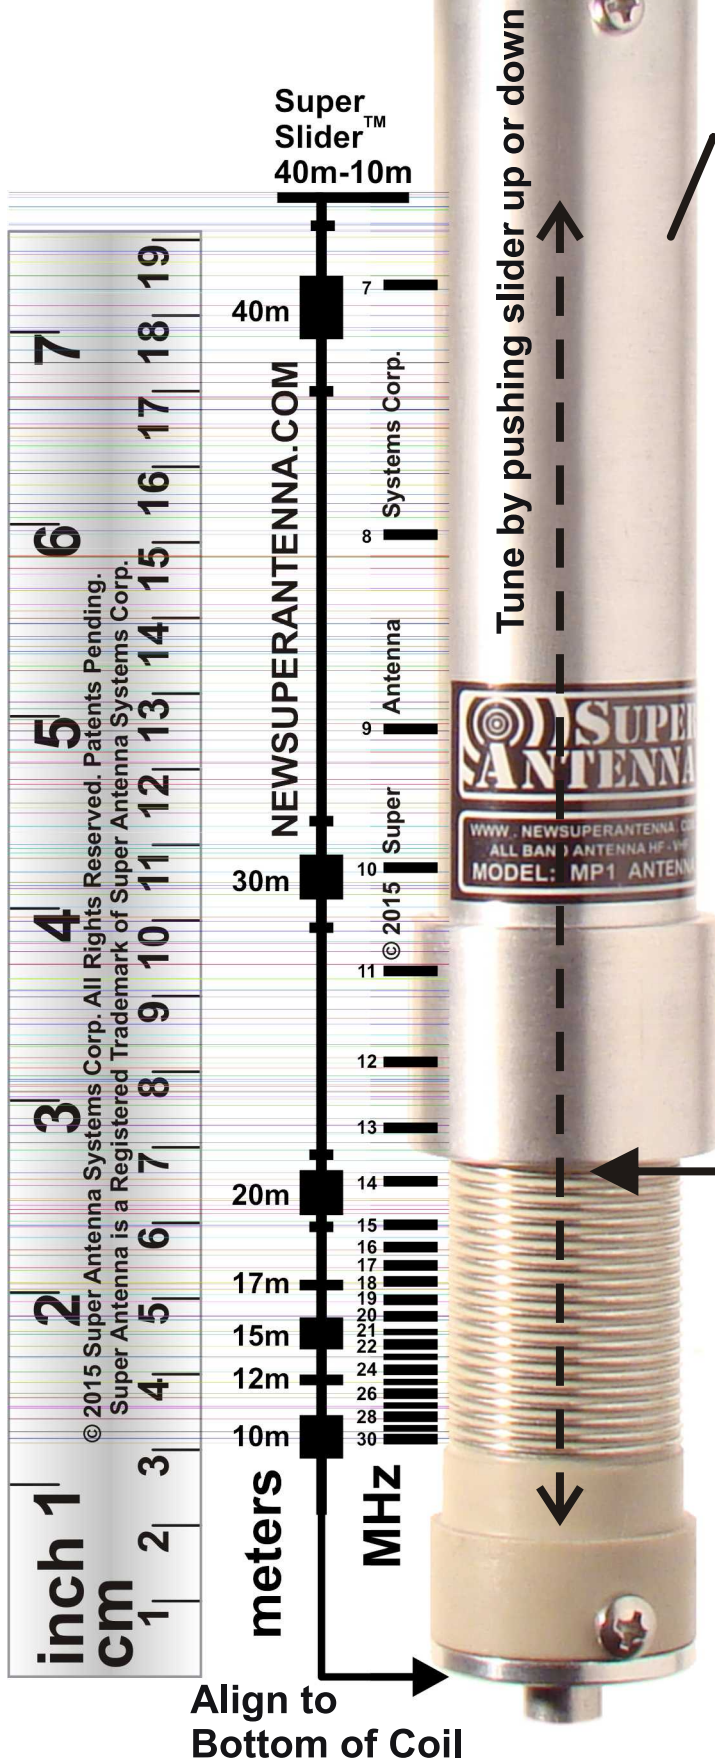

TH1 Thumb Screw
Loosen slightly to adjust.
Tighten Gently to Hold.

Measure Frequency Here
At the bottom of the
SuperSlider.

Tuning Procedure

1. Set up antenna with recommended mount and SuperWire Radial Sets for the desired bands.
2. Loosen the TH1 Thumb Screw slightly and move the SuperSlider to by sliding it up or down along the coil, to align with the desired frequency or metre band on the scale as indicated.
3. Check SWR, and re-adjust slightly down or up if necessary to achieve satisfactory tuning.
4. Gently tighten the TH1 Thumb Screw to hold the SuperSlider in position.
5. The antenna is now ready for normal operation.